



CONTACTOR, AC-3 3 KW/400 V, 1 NC,  
AC 24 V, 50/60 HZ, 3-POLE, SIZE S00,  
SCREW CONNECTION

### General technical data:

<b>product brand name</b>		SIRIUS
<b>Size of the contactor</b>		S00
<b>Protection class IP / on the front</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature / during operating</b>	°C	-25 ... +60
<b>Mechanical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• of the contactor / typical</li> </ul>		30,000,000
<ul style="list-style-type: none"> <li>• of the contactor with added auxiliary switch block / typical</li> </ul>		10,000,000
<ul style="list-style-type: none"> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		5,000,000

### Main circuit:

<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating current</b>		
<ul style="list-style-type: none"> <li>• at AC-3 / at 400 V / rated value</li> </ul>	A	7
<ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>	A	6.5
<ul style="list-style-type: none"> <li>• with 1 current path / at DC-1</li> <li>• at 24 V / rated value</li> </ul>	A	15

<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	1.5
<ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-1</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul>	A	8.4
<ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-1</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• with 1 current path / at DC-3 / at DC-5</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul>	A	0.1
<ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-3 / at DC-5</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul>	A	0.25
<ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-3 / at DC-5</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul>	A	15
<b>Service power</b>		
<ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> </ul>	kW	3
<ul style="list-style-type: none"> <li>• at AC-3 / at 400 V / rated value</li> </ul>	kW	3
<ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>	W	3,000

Control circuit:		
<b>Type of voltage / of the controlled supply voltage</b>		AC
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• for AC</li> </ul>		0.8 ... 1.1
<ul style="list-style-type: none"> <li>• at 60 Hz</li> <li>• for AC</li> </ul>		0.85 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	27
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	4.4
<b>Inductive power factor / with the pull-in power of the coil</b>		0.8
<b>Inductive power factor / with the pull-in power of the coil</b>		0.27

Auxiliary circuit:		
<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		1
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		0

### Short-circuit:

<b>Design of the fuse link</b>	<ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch / required</li> </ul>	fuse gL/gG: 10 A
	<ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit</li> </ul>	fuse gL/gG: 35 A
	<ul style="list-style-type: none"> <li>• with type of assignment 1 / required</li> <li>• at type of coordination 2 / required</li> </ul>	fuse gL/gG: 20 A

### Installation/mounting/dimensions:

<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<b>series installation</b>		Yes
<b>Width</b>	mm	45
<b>Height</b>	mm	57.5
<b>Depth</b>	mm	72
<b>Distance, to be maintained, to earthed part / sideways</b>	mm	6

### Connection type:

<b>Design of the electrical connection</b>	<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	screw-type terminals
	<ul style="list-style-type: none"> <li>• for auxiliary and control current circuit</li> </ul>	screw-type terminals
<b>Type of the connectable conductor cross-section</b>	<ul style="list-style-type: none"> <li>• for main contacts</li> </ul>	
	<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> )
	<ul style="list-style-type: none"> <li>• finely stranded</li> </ul>	
	<ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
	<ul style="list-style-type: none"> <li>• for AWG conductors / for main contacts</li> </ul>	2x (20 ... 16), 2x (18 ... 14), 1x 12
	<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>• finely stranded</li> </ul>		
<ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )	
<ul style="list-style-type: none"> <li>• for AWG conductors / for auxiliary contacts</li> </ul>	2x (20 ... 16), 2x (18 ... 14), 1x 12	

### Certificates/approvals:

General Product Approval



Functional Safety /  
Safety of  
Machinery

Declaration of  
Conformity

Test Certificates

[Type Examination](#)

[Special Test  
Certificate](#)

Shipping Approval



DNV

GL

LRS

PRS

Shipping Approval

other



RMRS

[Confirmation](#)

[other](#)

[Environmental  
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1015-1AB02/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1015-1AB02](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1015-1AB02)

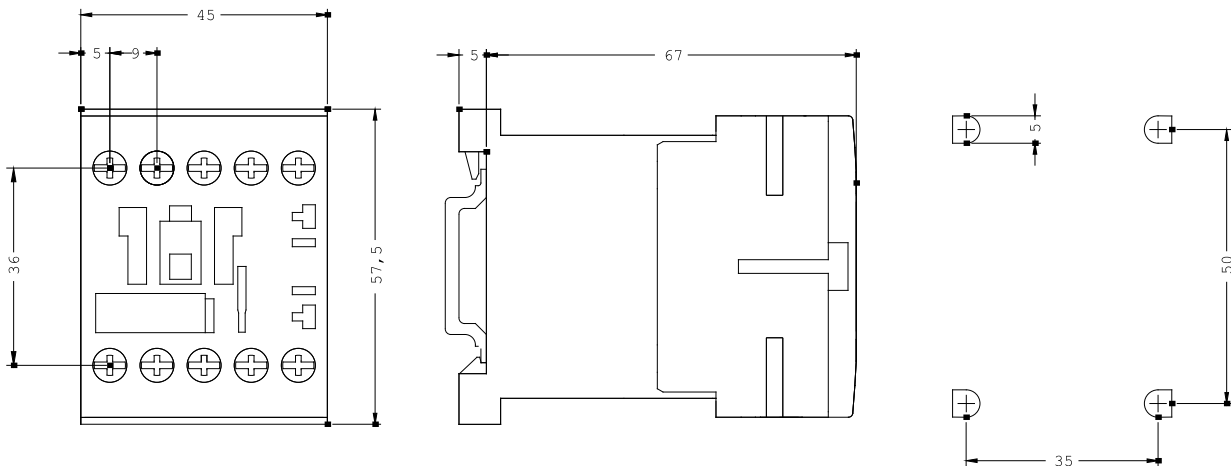

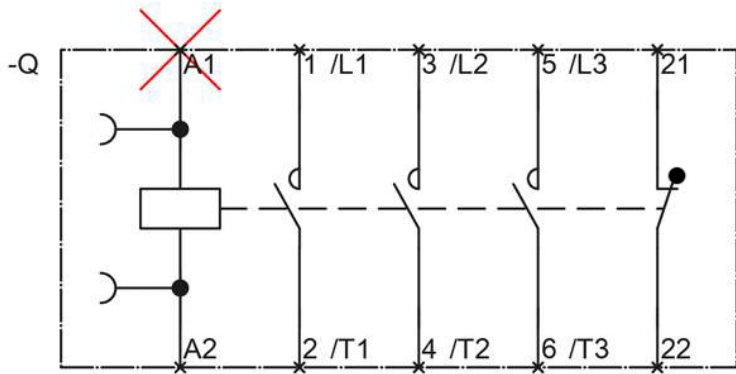

last change:

Feb 24, 2014