



CONTACTOR, AC-3 3 KW/400 V, 1 NO,
DC 24 V, 3-POLE, SIZE S00,
SCREW CONNECTION

General details:		
Product brand name	SIRIUS	
product designation	power contactor	
Size of the contactor	S00	
Protection class IP / on the front	IP20	
Degree of pollution	3	
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Active power loss / per conductor / typical	W	0.42
Item designation	<ul style="list-style-type: none">• according to DIN EN 61346-2• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750	
Mechanical operating cycles as operating time	<ul style="list-style-type: none">• of the contactor / typical• of the contactor with added auxiliary switch block / typical• of the contactor with added electronics-compatible auxiliary switch block / typical	
	Q	30,000,000
	K	10,000,000
		5,000,000
Main circuit:		
Number of poles / for main current circuit	3	

Number of NC contacts / for main contacts	0	
Number of NO contacts / for main contacts	3	
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	A	18
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	A	16
Operating current		
• at AC-3 / at 400 V / rated value	A	7
• with 1 current path		
• at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	1.5
• at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	0.1
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	8.4
• at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	0.25
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	15
• at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	15
Service power		
• at AC-1 / at 400 V / rated value	kW	11
• at AC-2 / at 400 V / rated value	kW	3
• at AC-3		
• at 400 V / rated value	kW	3
• at 500 V / rated value	kW	3.5
• at 690 V / rated value	kW	4



Control circuit:	
Design of activation	conventional
Type of voltage / of the controlled supply voltage	DC
Control supply voltage / 1	

• for DC		
• rated value	V	24

Auxiliary circuit:			
Contact reliability / of the auxiliary contacts			1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts			
• instantaneous switching		0	
• lagging switching		0	
Number of NO contacts / for auxiliary contacts			
• instantaneous switching		1	
• leading switching		0	
Operating current / of the auxiliary contacts			
• at AC-12 / maximum	A	10	
• at AC-15			
• at 230 V	A	6	
• at 400 V	A	3	
• at DC-12			
• at 60 V	A	6	
• at 110 V	A	3	
• at 220 V	A	1	
• at DC-13			
• at 24 V	A	10	
• at 60 V	A	2	
• at 110 V	A	1	
• at 220 V	A	0.3	

Short-circuit:			
Design of the fuse link			
• for short-circuit protection of the auxiliary switch / required			fuse gL/gG: 10 A
• for short-circuit protection of the main circuit			
• with type of assignment 1 / required			fuse gL/gG: 35 A
• at type of coordination 2 / required			fuse gL/gG: 20 A

Installation/mounting/dimensions:			
Type of mounting			screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
series installation			Yes
Width	mm	45	
Height	mm	57.5	
Depth	mm	72	
Distance, to be maintained, to earthed part / sideways	mm	6	

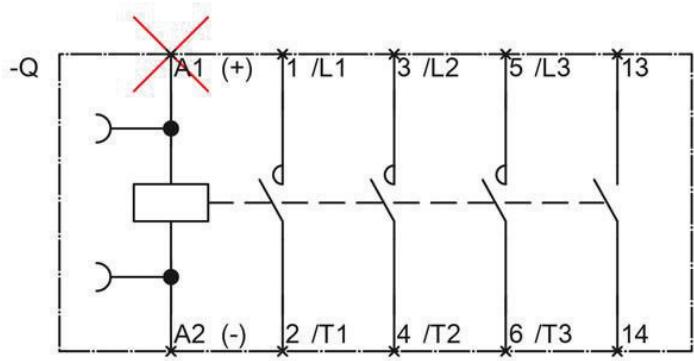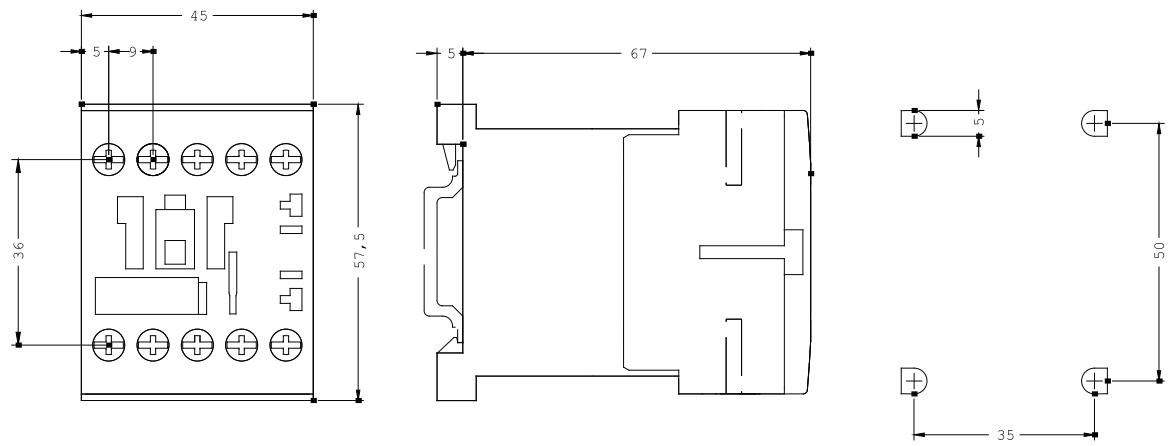

last change:

Sep 30, 2011