



CONTACTOR, AC-3 4 KW/400 V, 1 NO,
AC 24 V, 50/60 HZ, 3-POLE, SIZE S00,
SCREW CONNECTION

General details:

Product brand name	SIRIUS	
product designation	power contactor	
Size of the contactor	S00	
Protection class IP / on the front	IP20	
Degree of pollution	3	
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Active power loss / per conductor / typical	W	0.7
Item designation		
• according to DIN EN 61346-2	Q	
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750	K	
Mechanical operating cycles as operating time		
• of the contactor / typical	30,000,000	
• of the contactor with added auxiliary switch block / typical	10,000,000	
• of the contactor with added electronics-compatible auxiliary switch block / typical	5,000,000	

Main circuit:

Number of poles / for main current circuit	3
---	---

Number of NC contacts / for main contacts	0	
Number of NO contacts / for main contacts	3	
Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value	A	22
Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value	A	20
Operating current		
• at AC-3 / at 400 V / rated value	A	9
• with 1 current path		
• at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	2.1
• at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.15
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	12
• at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	0.35
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
• at DC-3 / at DC-5		
• at 24 V / rated value	A	20
• at 110 V / rated value	A	20
Service power		
• at AC-1 / at 400 V / rated value	kW	13
• at AC-2 / at 400 V / rated value	kW	4
• at AC-3		
• at 400 V / rated value	kW	4
• at 500 V / rated value	kW	4.5
• at 690 V / rated value	kW	5.5



Control circuit:	
Design of activation	conventional
Type of voltage / of the controlled supply voltage	AC
Control supply voltage frequency	

• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage / 1		
• at 50 Hz / for AC • rated value	V	24

Auxiliary circuit:		
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts		
• instantaneous switching		0
• lagging switching		0
Number of NO contacts / for auxiliary contacts		
• instantaneous switching		1
• leading switching		0
Operating current / of the auxiliary contacts		
• at AC-12 / maximum		A 10
• at AC-15		
• at 230 V		A 6
• at 400 V		A 3
• at DC-12		
• at 60 V		A 6
• at 110 V		A 3
• at 220 V		A 1
• at DC-13		
• at 24 V		A 10
• at 60 V		A 2
• at 110 V		A 1
• at 220 V		A 0.3

Short-circuit:		
Design of the fuse link		
• for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
• for short-circuit protection of the main circuit		
• with type of assignment 1 / required		fuse gL/gG: 35 A
• at type of coordination 2 / required		fuse gL/gG: 20 A

Installation/mounting/dimensions:	
Type of mounting	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

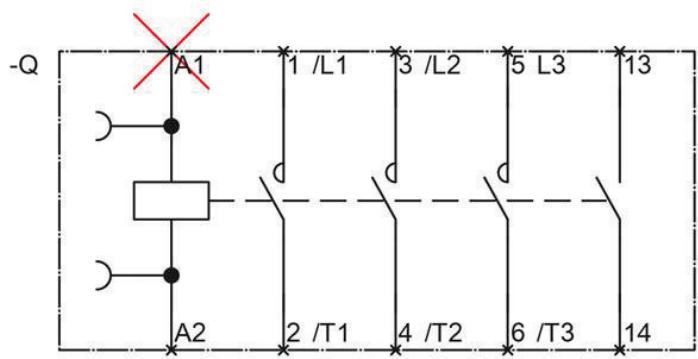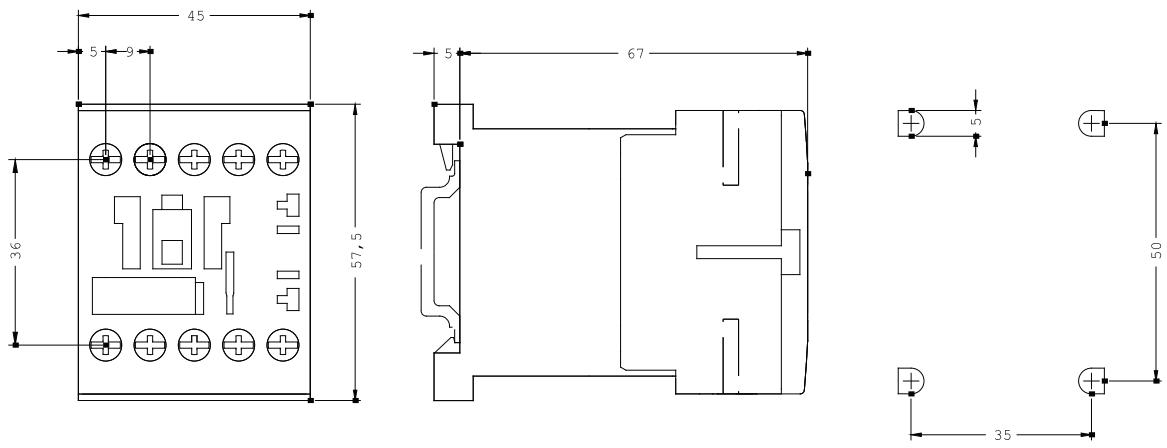

last change:

Sep 30, 2011